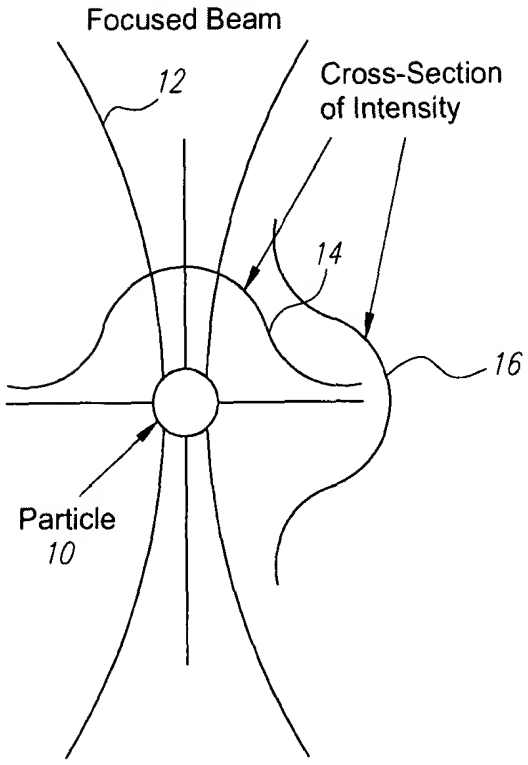

$$F_{\nabla} = 2\pi \cdot r^3 \frac{\sqrt{\varepsilon_B}}{c} \left(\frac{\varepsilon - \varepsilon_B}{\varepsilon + 2\varepsilon_B} \right) (\nabla \cdot I)$$

F_{∇} = Optical force on particle towards higher intensity

r = Radius of particle

ε_B = Dielectric constant of backround medium

ε = Dielectric constant of particle

I = Light intensity (W/cm^2)

∇ = Spatial derivative

FIG. 1

FIG. 2

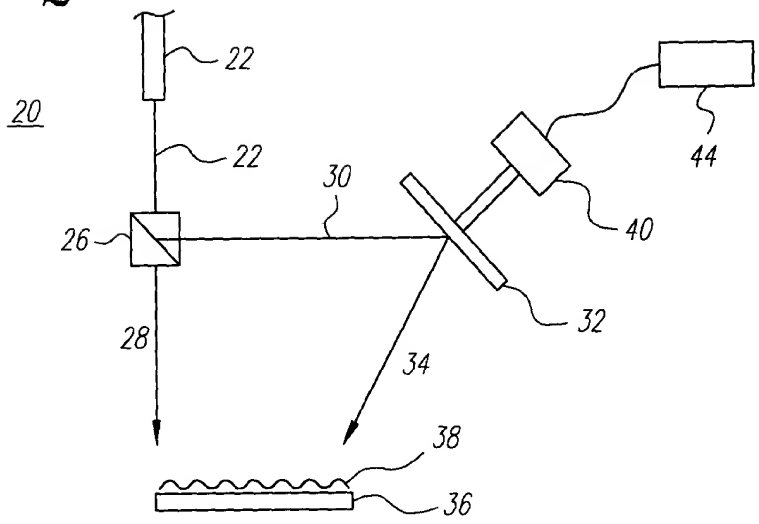

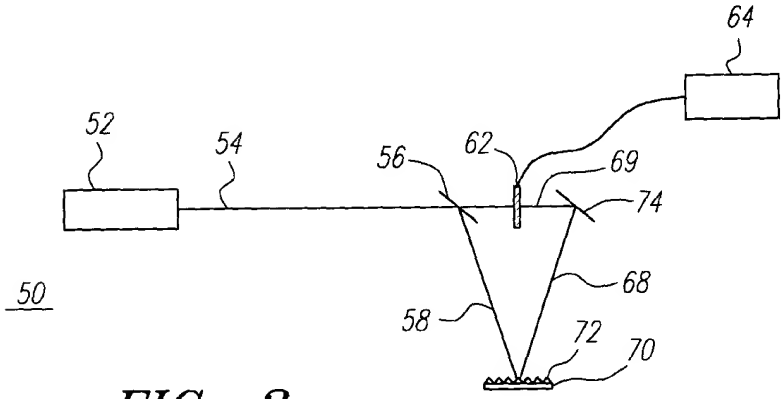

FIG. 3

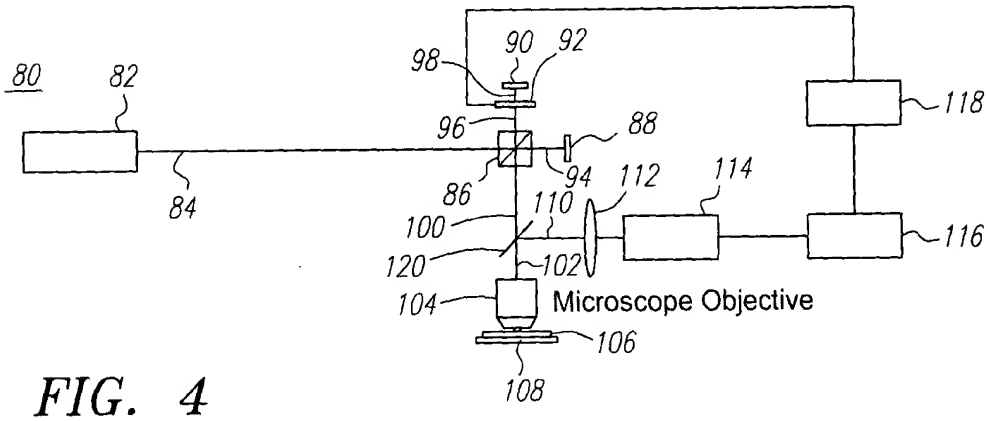

FIG. 4

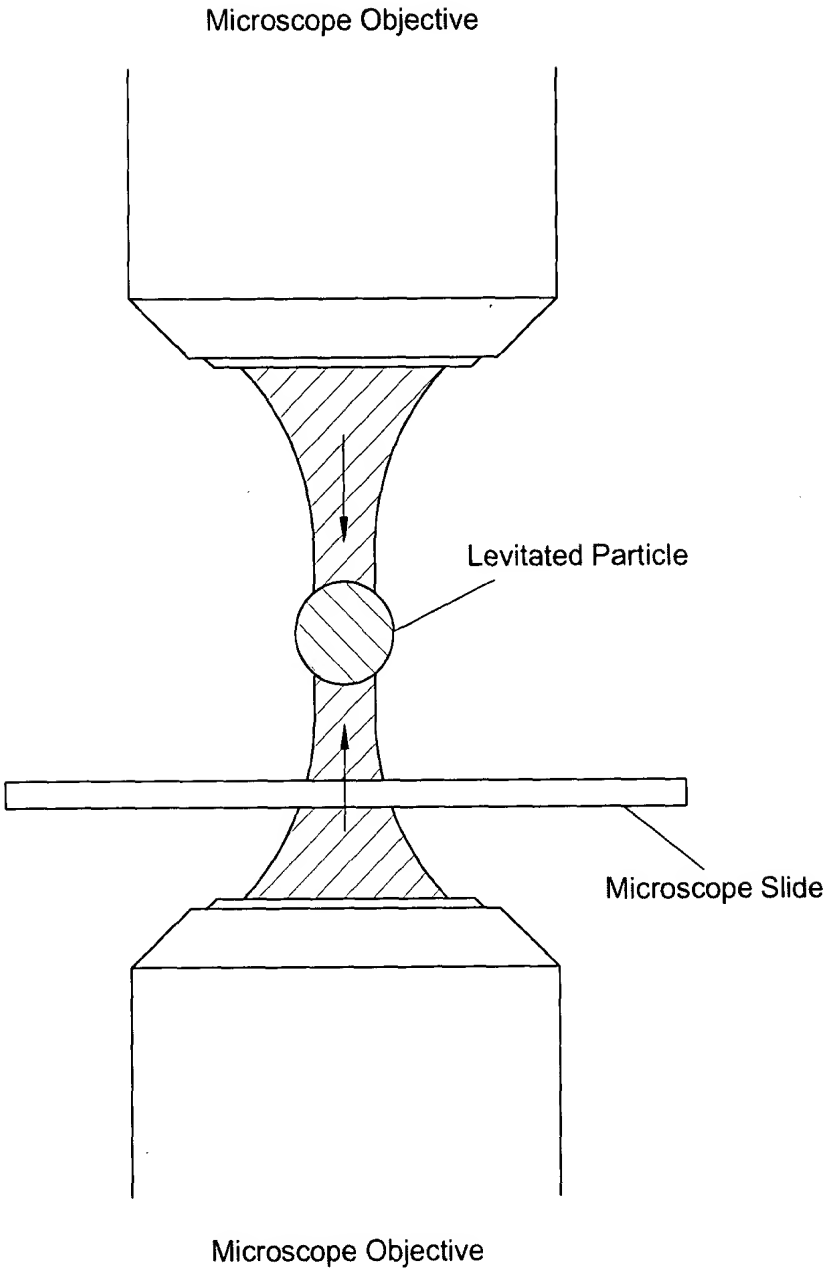

FIG. 4A

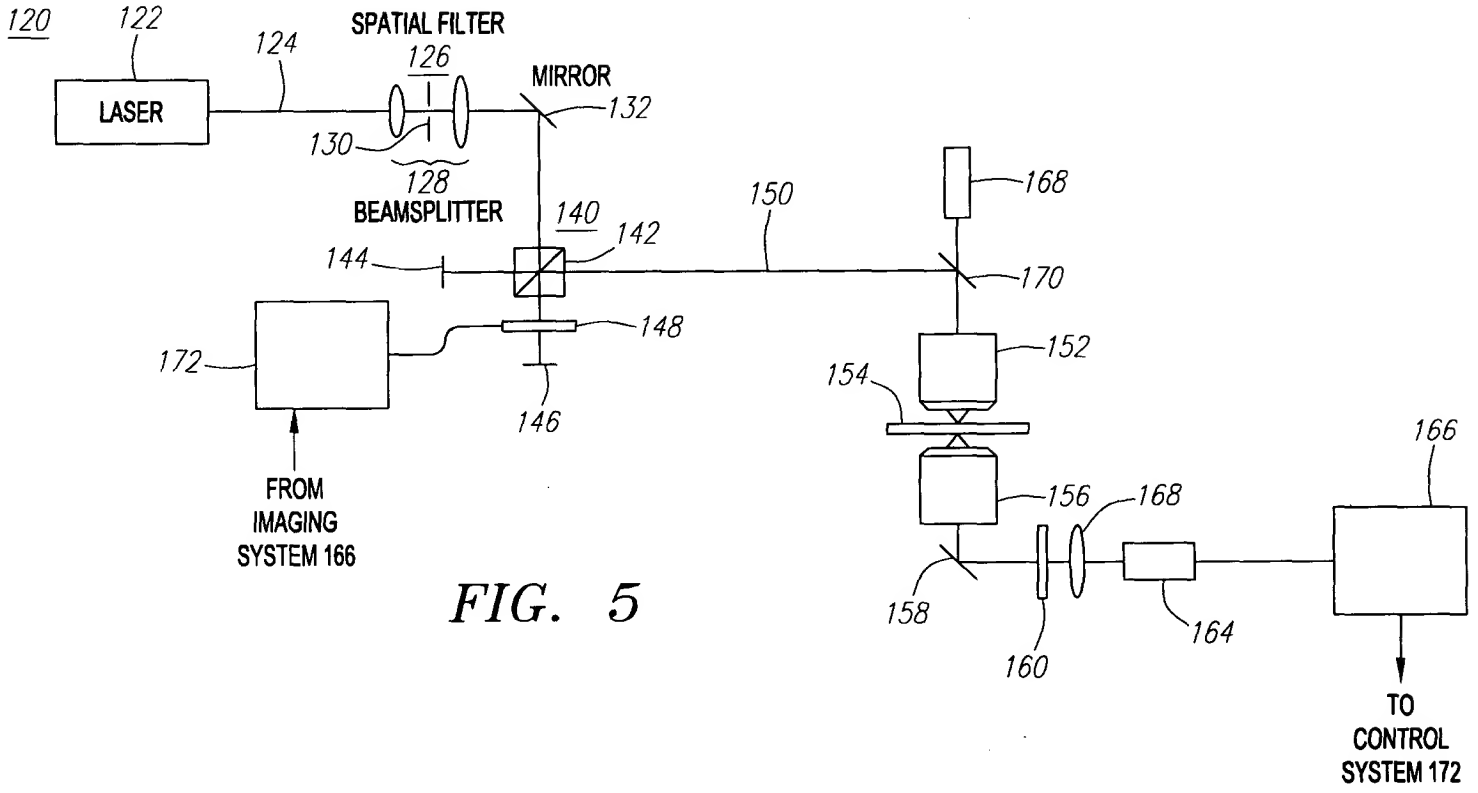
120
122
124
SPATIAL FILTER
126
LASER
MIRROR
132
130
128
BEAMSPLITTER
140
142
144
150
168
170
148
172
152
154
146
FROM
IMAGING
SYSTEM 166
166
156
168
158
160
164
TO
CONTROL
SYSTEM 172

FIG. 5

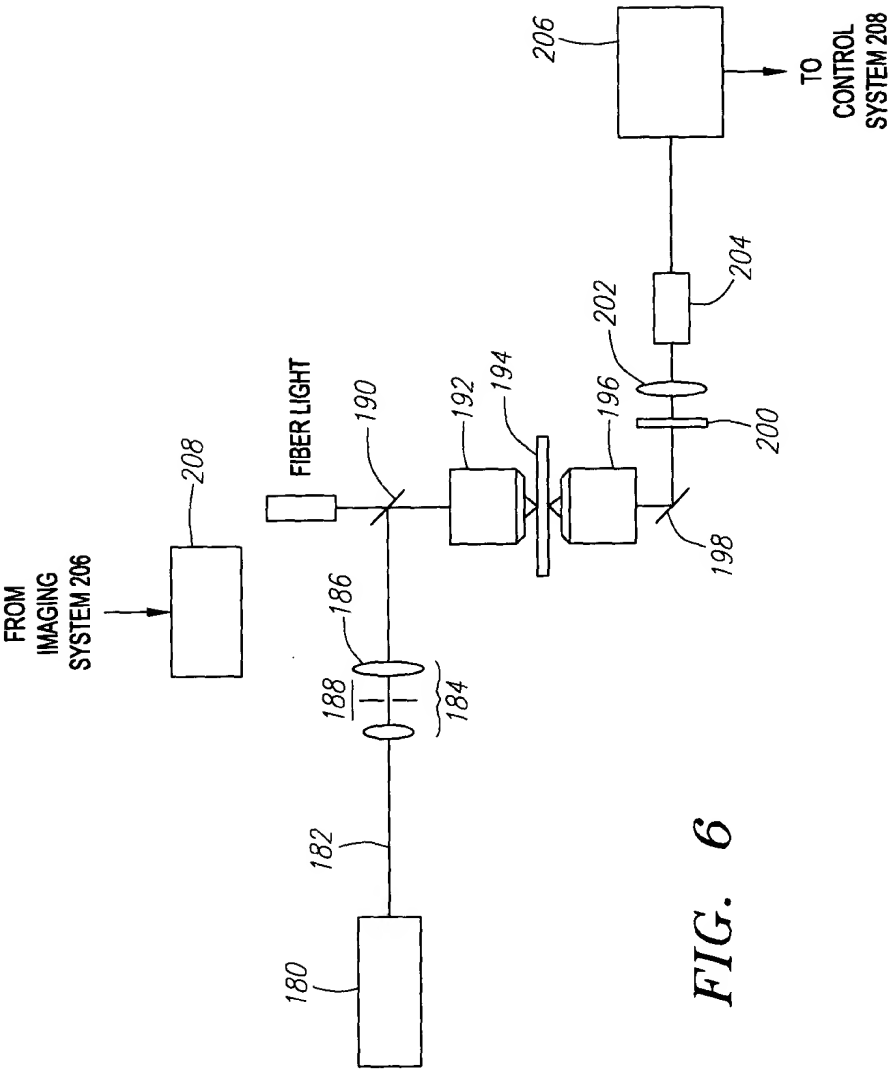
FROM IMAGING SYSTEM 206
208
FIBER LIGHT
180
182
184
186
188
190
192
194
196
198
200
202
204
206
TO CONTROL SYSTEM 208

FIG. 6

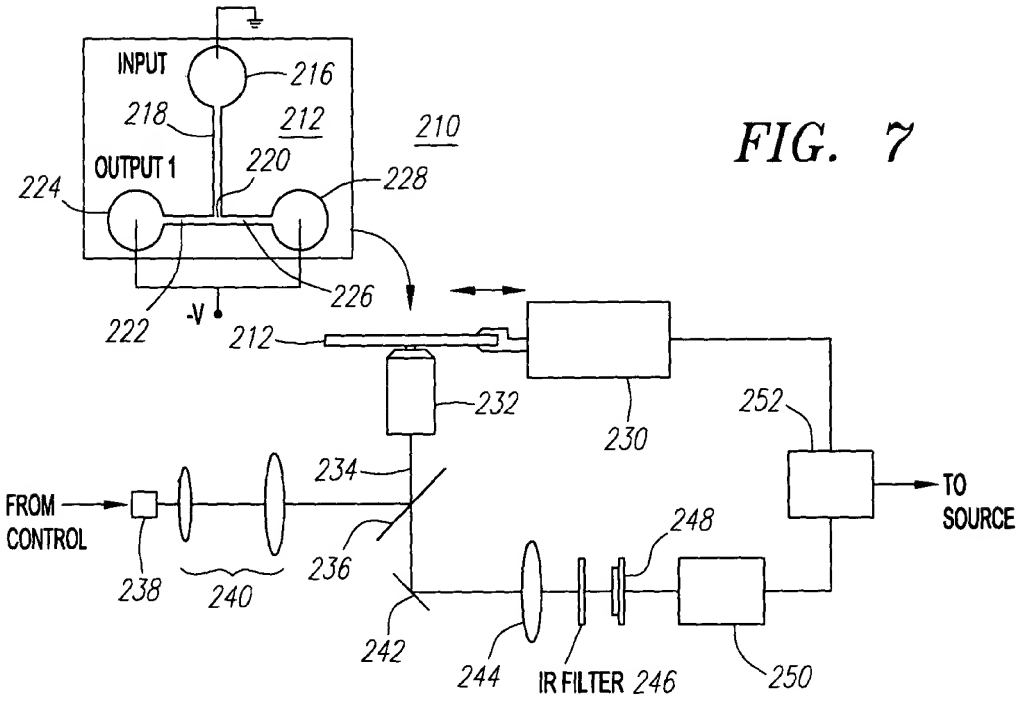
INPUT
216
218
212
210
OUTPUT 1
220
228
224
226
222
-V
212
232
230
252
234
FROM CONTROL
TO SOURCE
248
238
240
236
242
244
IR FILTER 246
250

FIG. 7

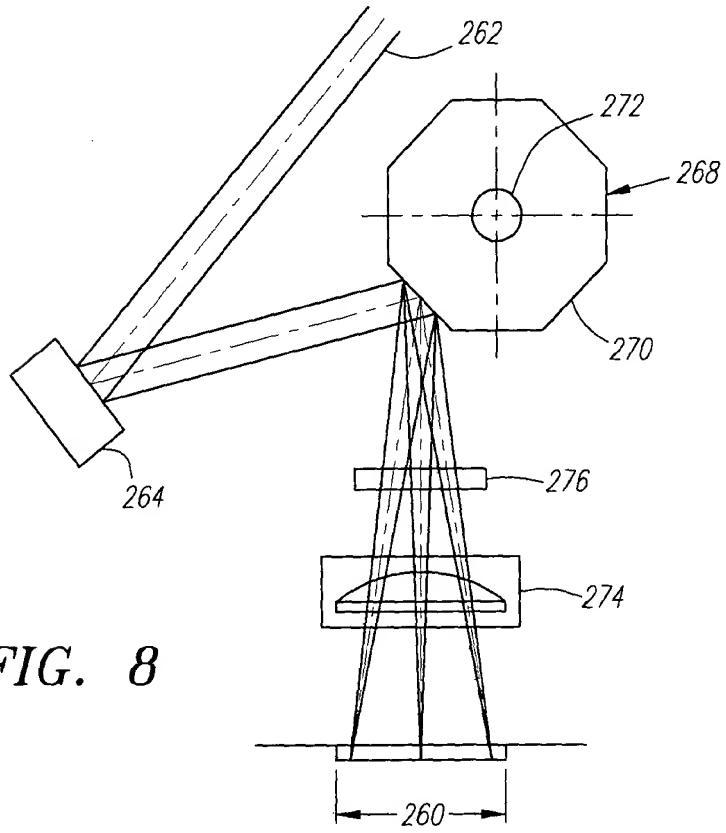
262
272
268
270
264
276
274
260

FIG. 8

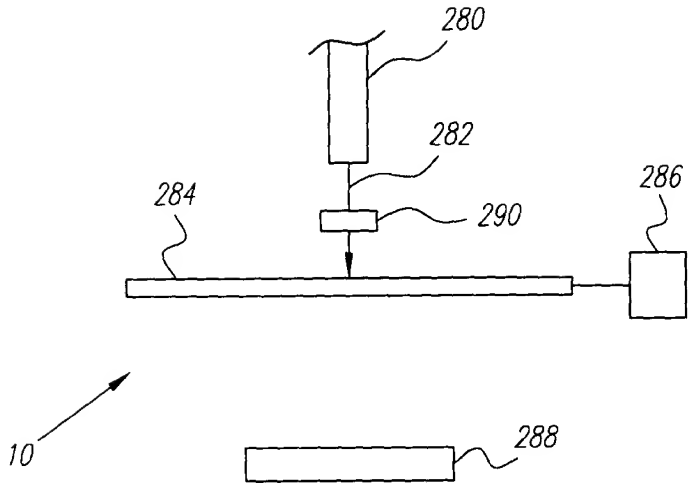

FIG. 9A

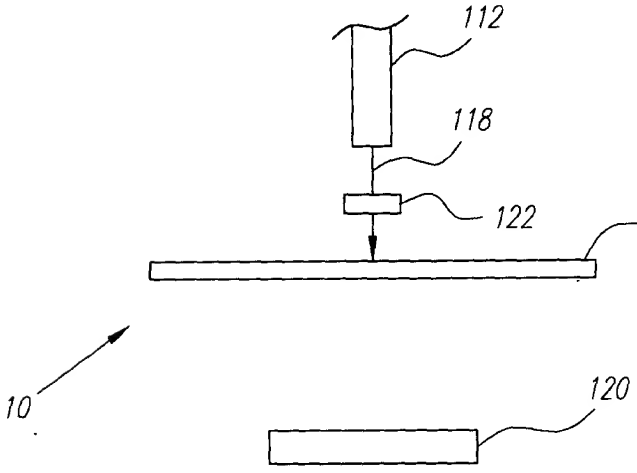

FIG. 9B

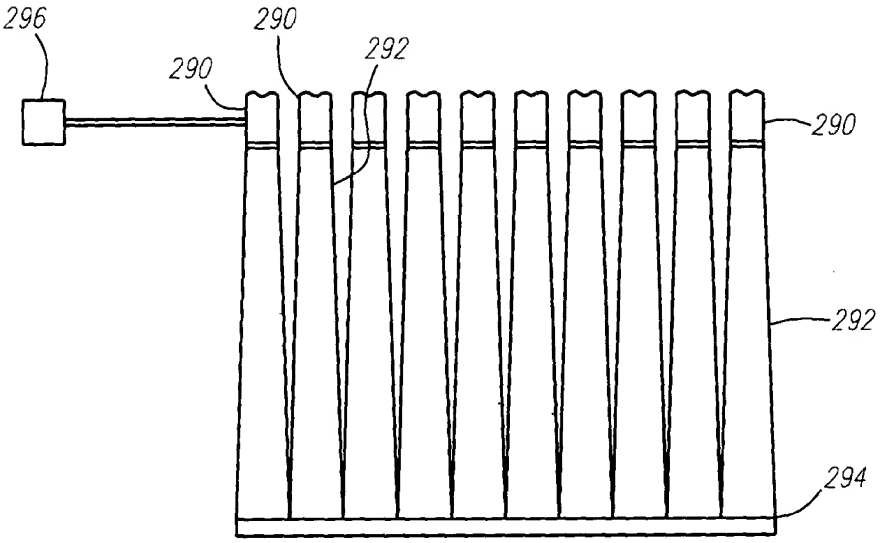

FIG. 10

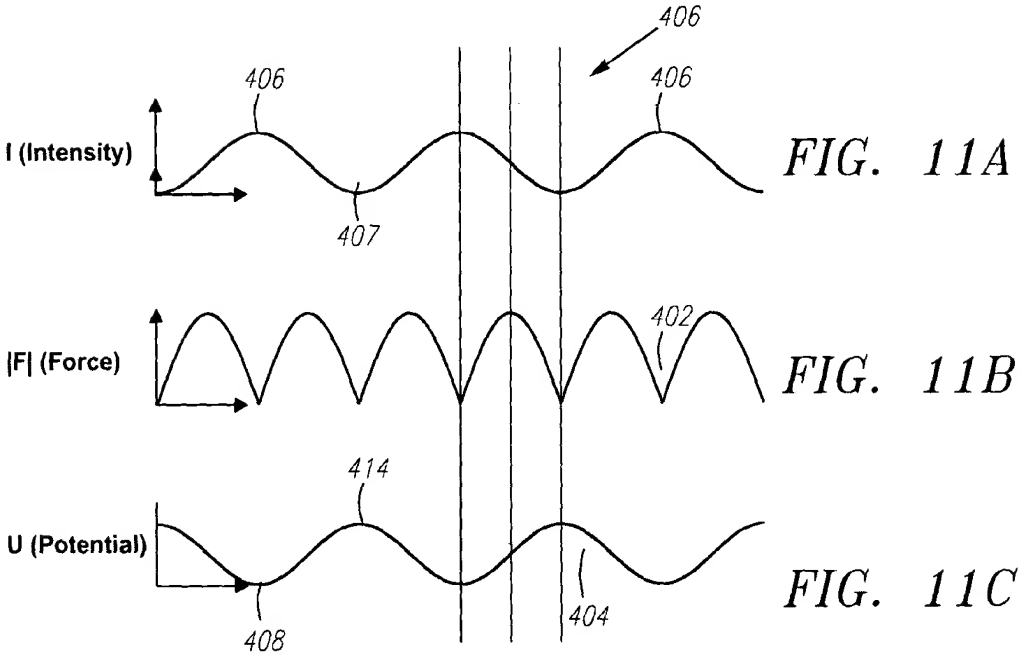

FIG. 11A

FIG. 11B

FIG. 11C

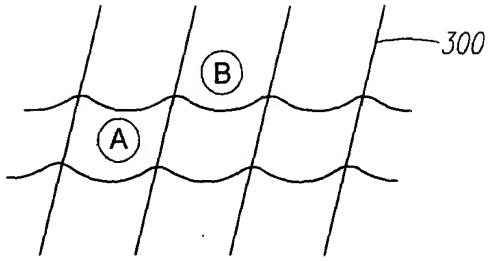

FIG. 12A

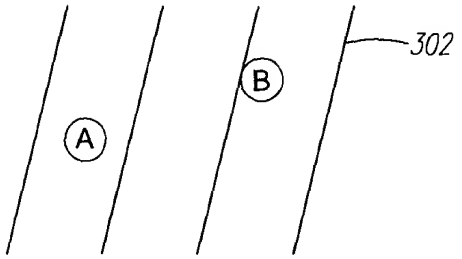

FIG. 12B

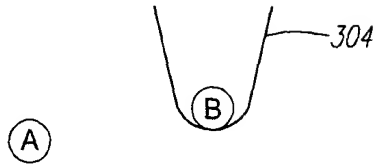

FIG. 12C

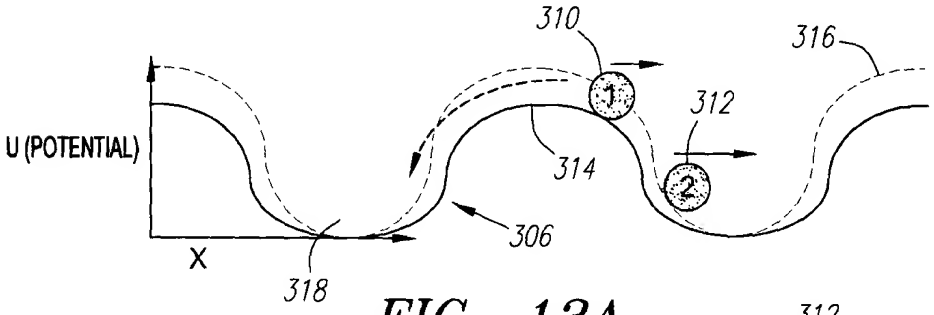

FIG. 13A

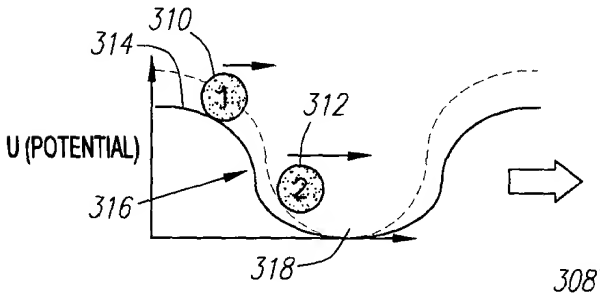

FIG. 13B

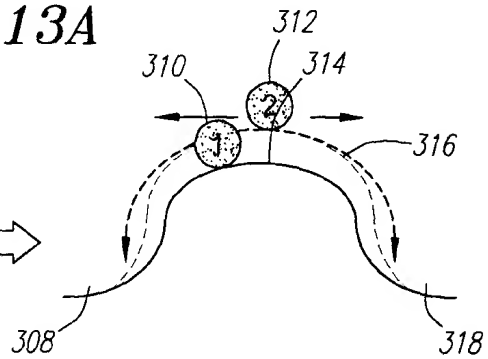

FIG. 13C

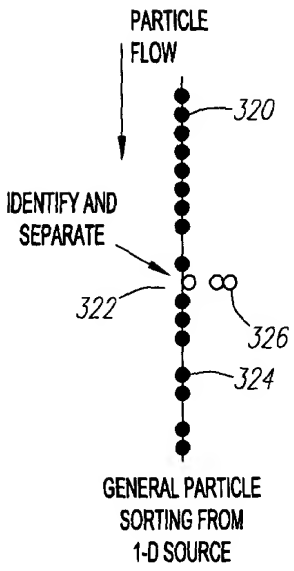

FIG. 14A

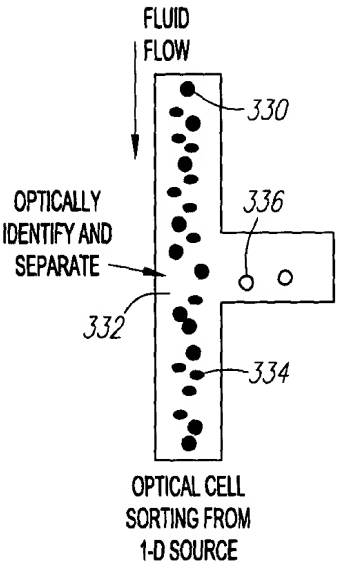

FIG. 14B

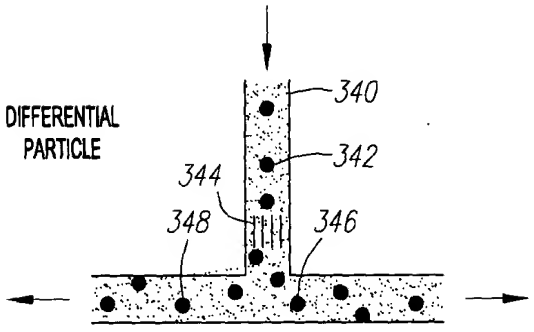

FIG. 15

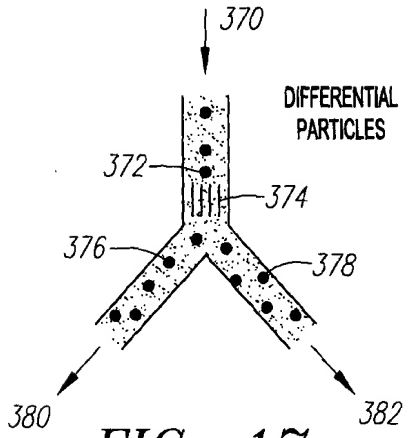

FIG. 17

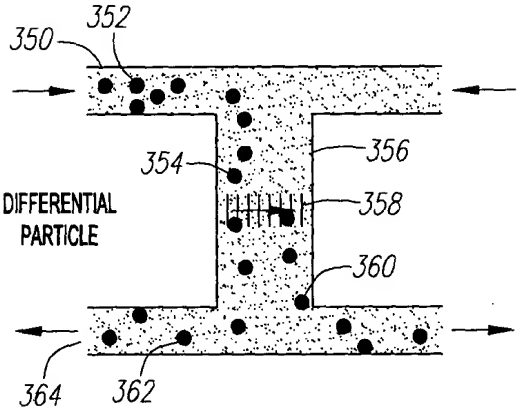

FIG. 16

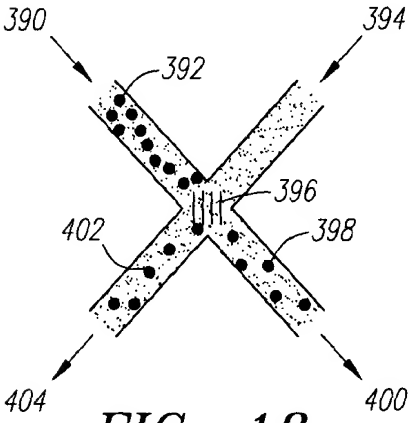

FIG. 18

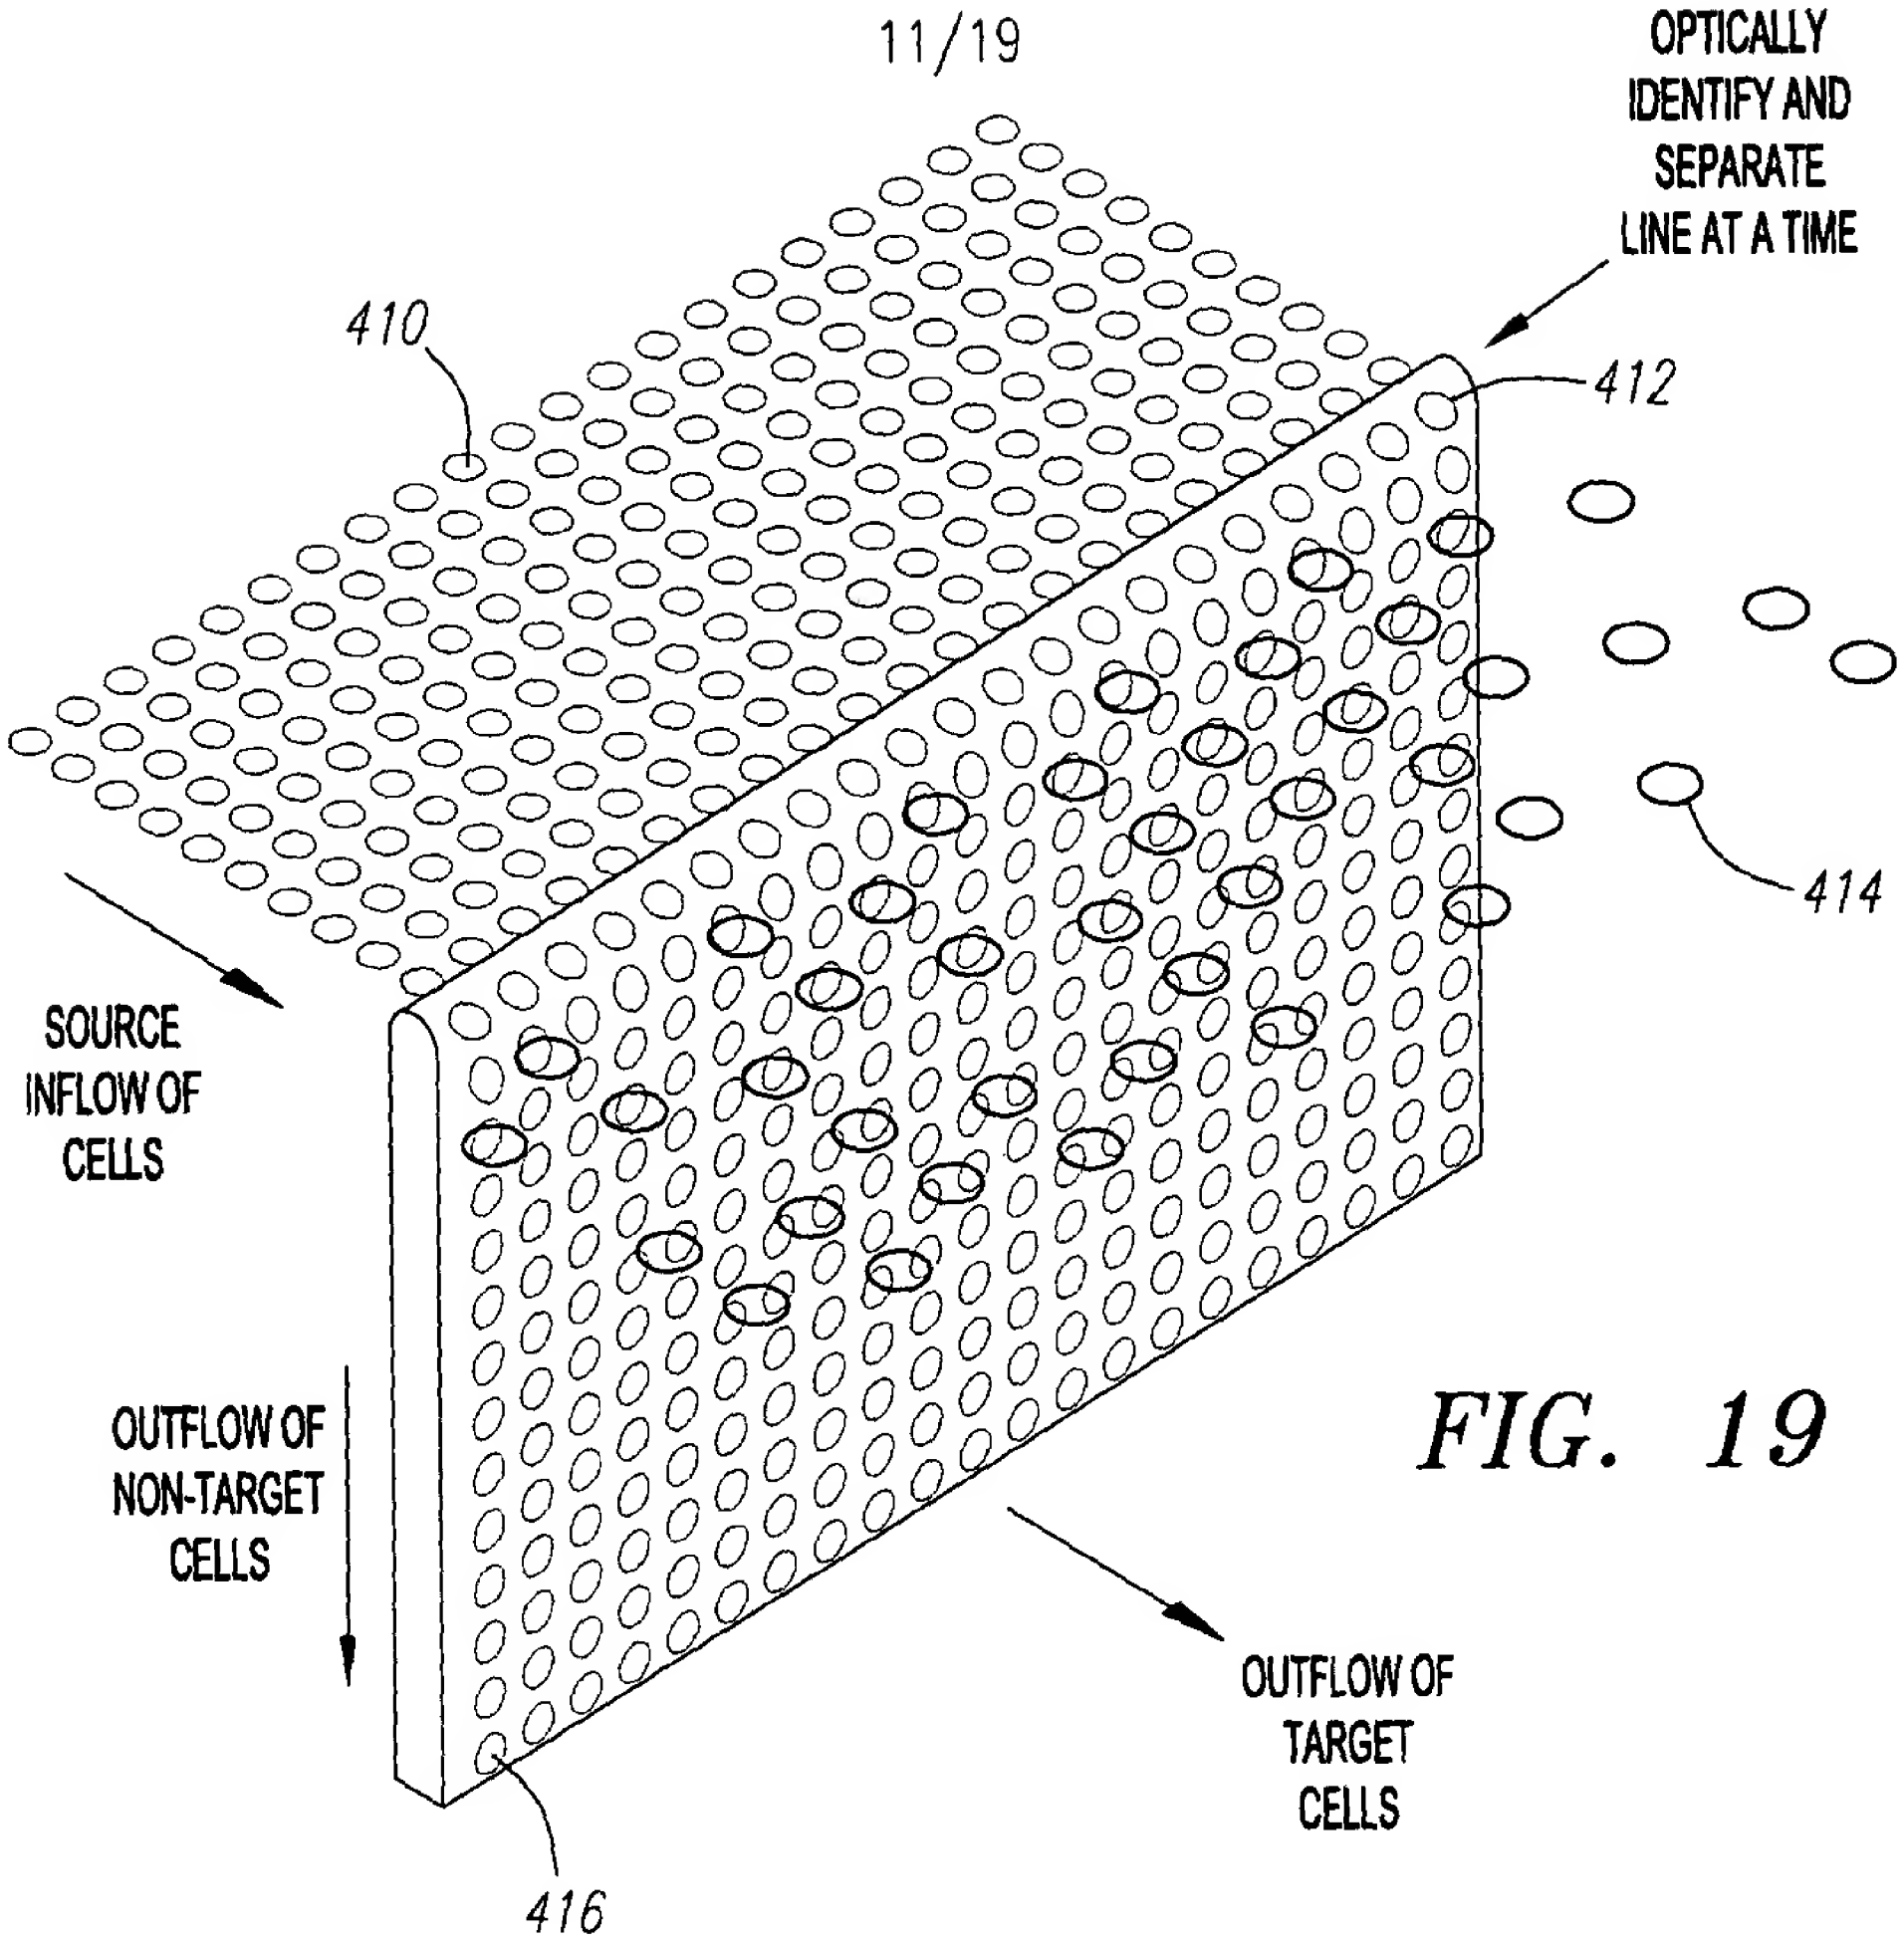

FIG. 19

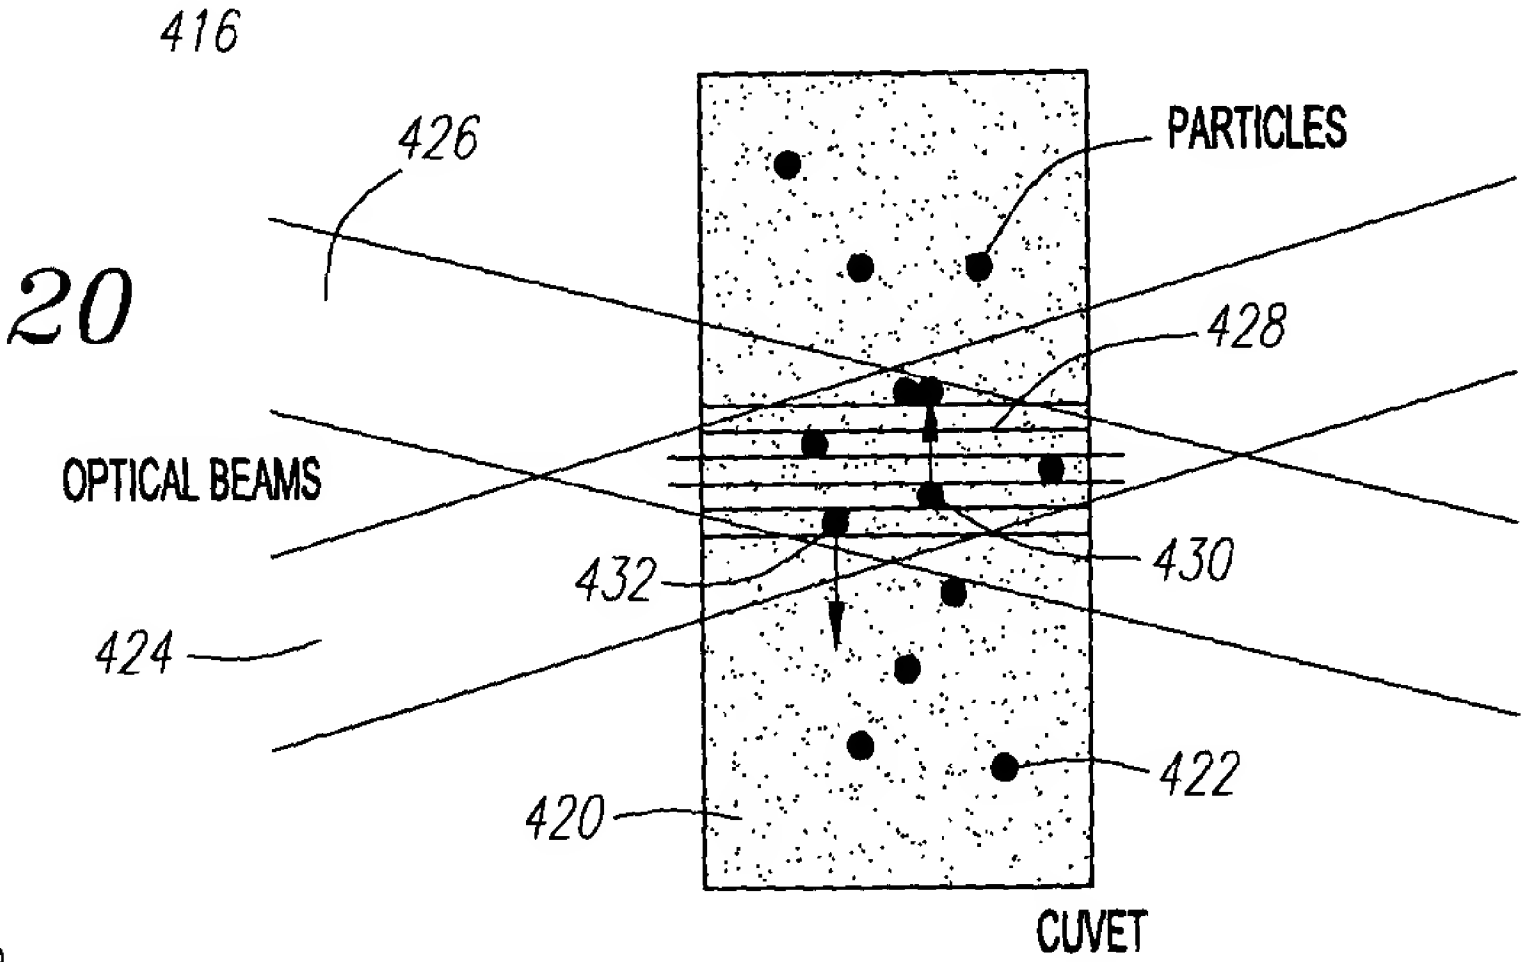

FIG. 20

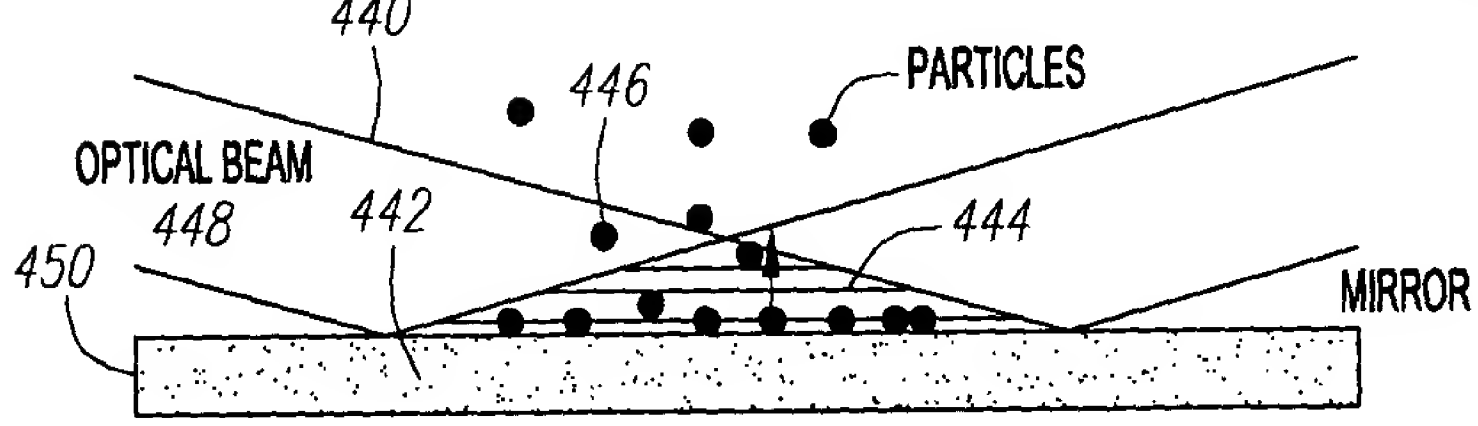

FIG. 21

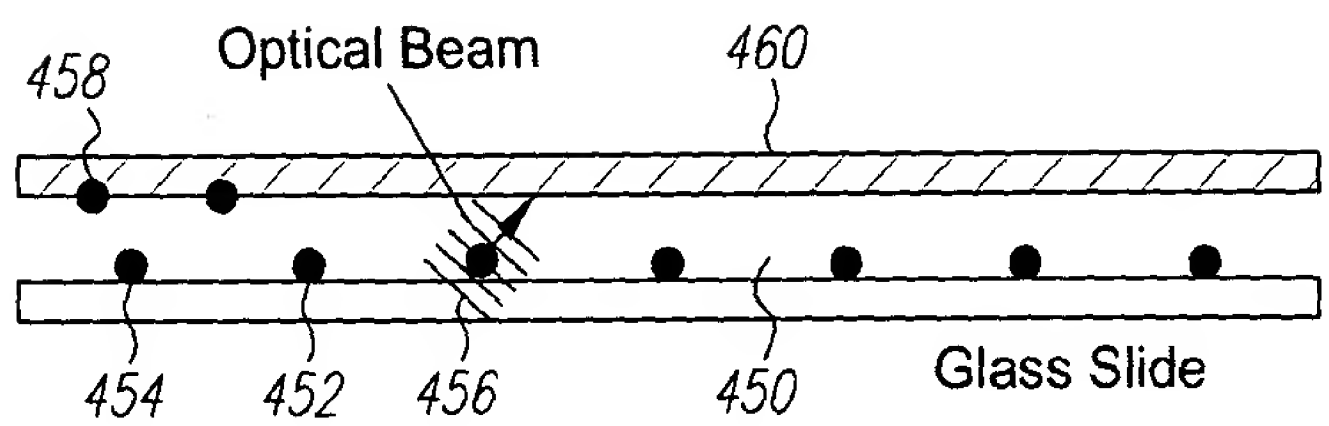

FIG. 22

FIG. 23

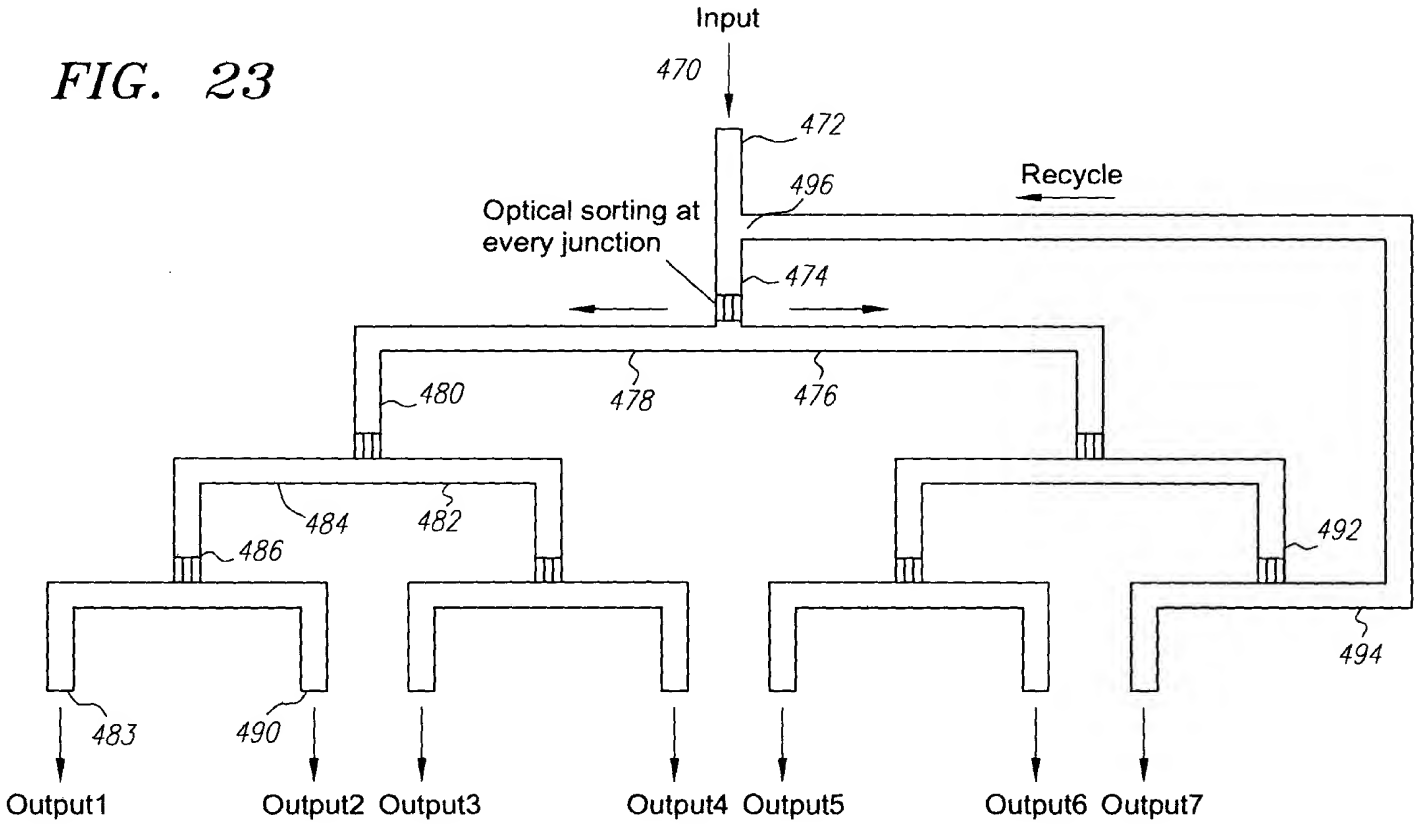
Input
470
472
496
Recycle
Optical sorting at
every junction
474
480
478
476
484
482
486
492
494
483
490
Output1
Output2
Output3
Output4
Output5
Output6
Output7

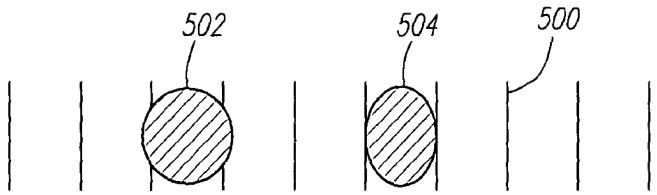

FIG. 24

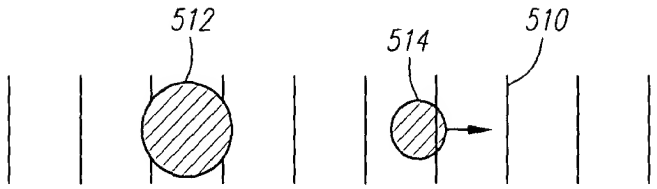

FIG. 25

Before: SCATTER FORCE SEPARATION

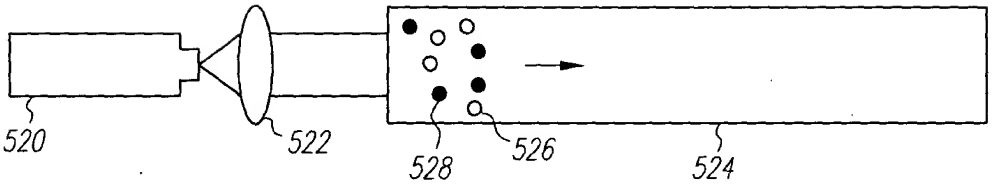

After:

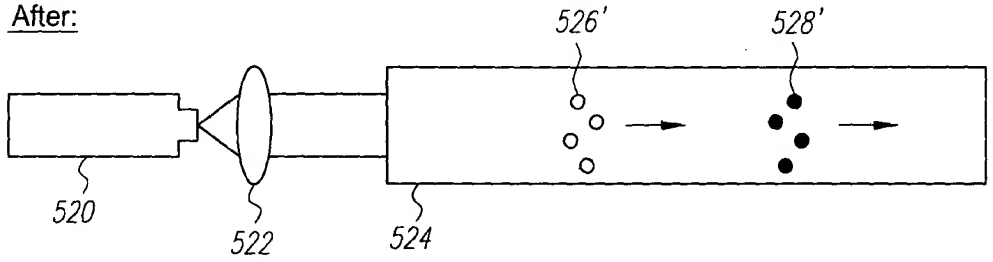

FIG. 26

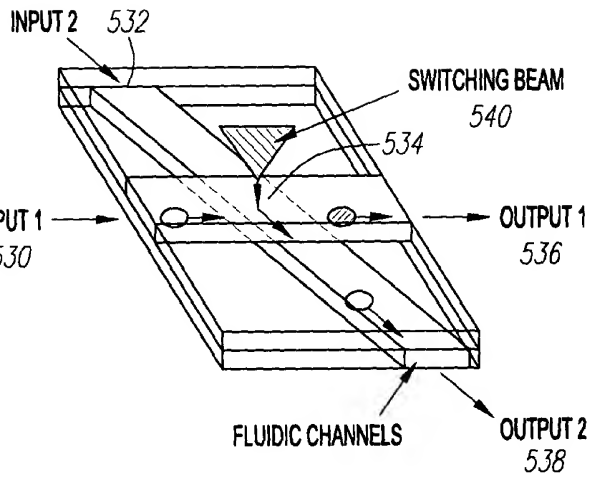

FIG. 27A

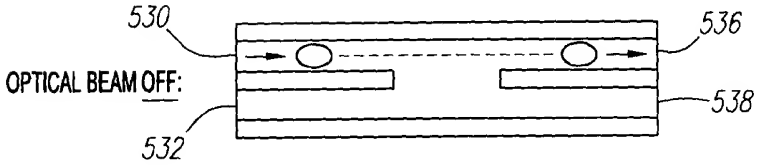

FIG. 27B

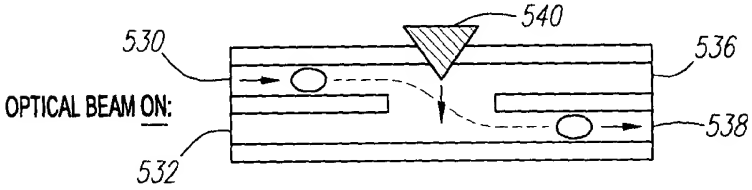

FIG. 27C

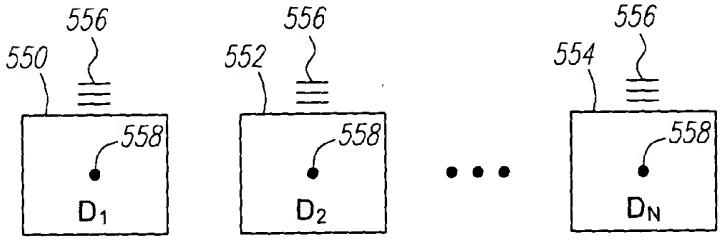

FIG. 28

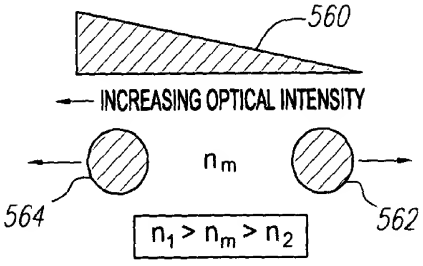

FIG. 29

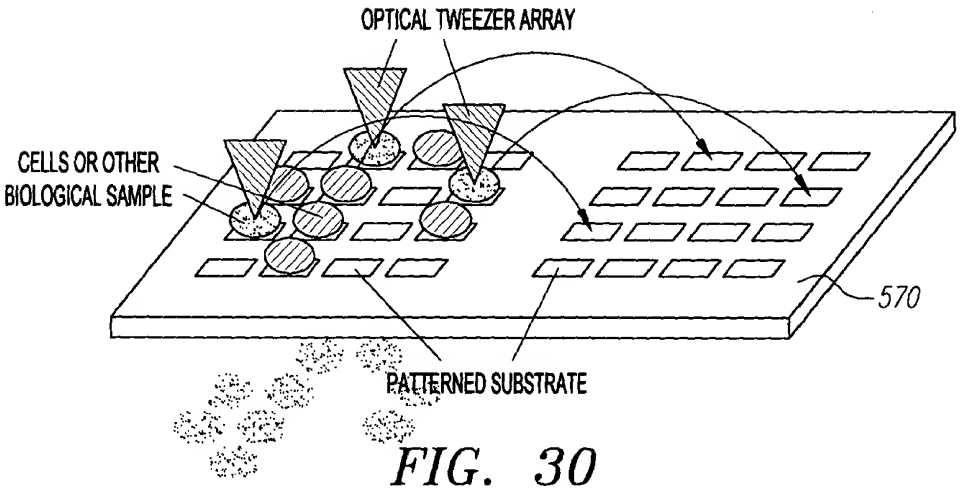
OPTICAL TWEEZER ARRAY
CELLS OR OTHER
BIOLOGICAL SAMPLE
570
PATTERNED SUBSTRATE

FIG. 30

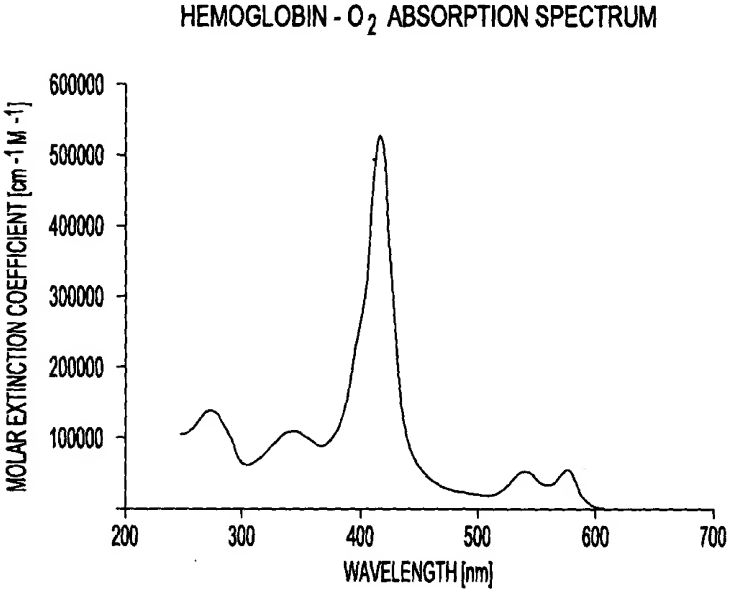
HEMOGLOBIN - O_2 ABSORPTION SPECTRUM
MOLAR EXTINCTION COEFFICIENT [cm -1 M -1]
600000
500000
400000
300000
200000
100000
200
300
400
500
600
700
WAVELENGTH [nm]

FIG. 31

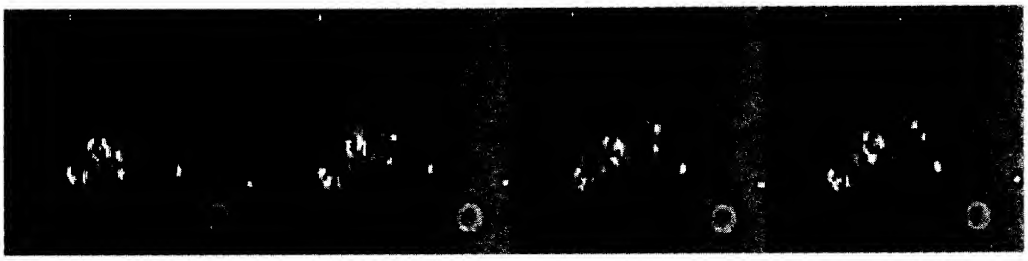

FIG. 32

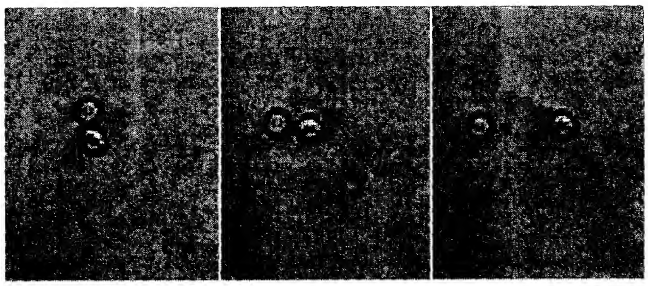

FIG. 33

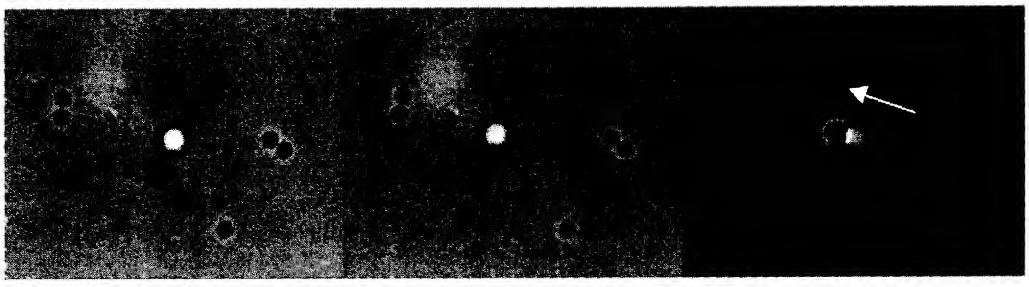

Before After Difference

FIG. 34

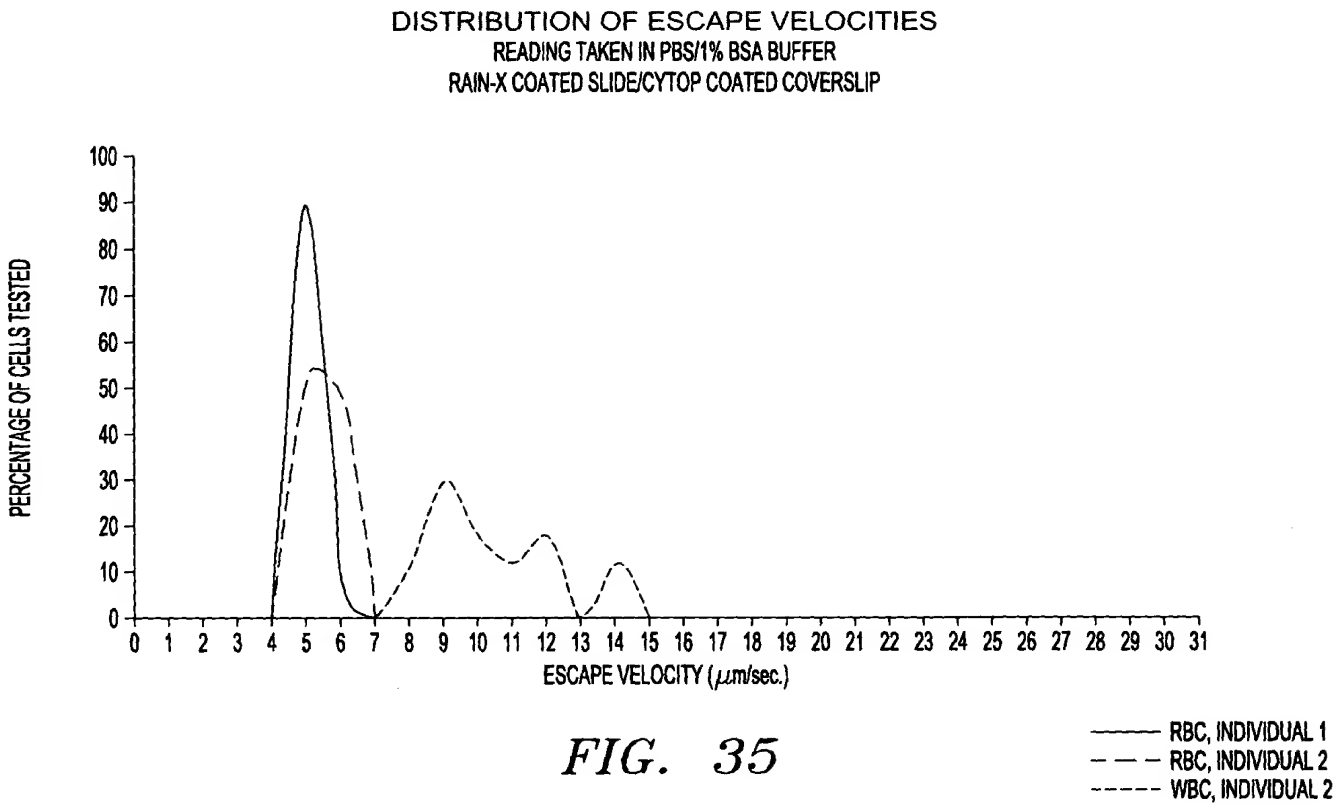
DISTRIBUTION OF ESCAPE VELOCITIES
READING TAKEN IN PBS/1% BSA BUFFER
RAIN-X COATED SLIDE/CYTOP COATED COVERSLIP
PERCENTAGE OF CELLS TESTED
100
90
80
70
60
50
40
30
20
10
0
0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31
ESCAPE VELOCITY (μm/sec.)
RBC, INDIVIDUAL 1
RBC, INDIVIDUAL 2
WBC, INDIVIDUAL 2

FIG. 35

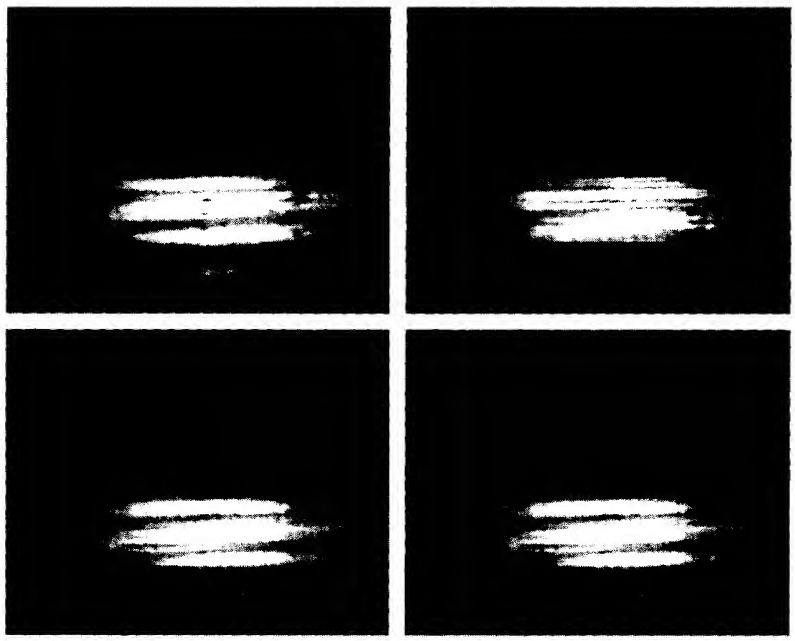

FIG. 36